

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 289 013
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 88106792.0

(51) Int. Cl.⁴: H02M 3/335

(22) Date of filing: 28.04.88

(30) Priority: 30.04.87 JP 106636/87
30.04.87 JP 106637/87

(43) Date of publication of application:
02.11.88 Bulletin 88/44

(34) Designated Contracting States:
DE FR GB IT NL SE

(71) Applicant: Matsushita Electric Industrial Co.,
Ltd.
1006, Oaza Kadoma
Kadoma-shi Osaka-fu, 571(JP)

(72) Inventor: Matsumoto, Takahiro
3-8-9, Awa, Ikagura-cho
Ikoma-gun Nara-ken(JP)
Inventor: Suenaga, Haruo
12-14-3, Nagamodai Kamo-cho
Soraku-gun Kyoto-fu(JP)
Inventor: Maehara, Naoyoshi
385-75, Yao Tawaramoto-cho
Shiki-gun Nara-ken(JP)
Inventor: Sakamoto, Kazuho
24, Umetani kitatani Kizu-cho
Soraku-gun Kyoto-fu(JP)
Inventor: Niwa, Takashi
5-31, Okidome, Ikaruga-cho
Ikoma-gun Nara-ken(JP)
Inventor: Kusunoki, Shigeru
89-4, Yatayama-cho
Yamatokoriyama-shi Nara-ken(JP)
Inventor: Shitaya, Takao
80-11, Yatayama-cho
Yamatokoriyama-shi Nara-ken(JP)
Inventor: Bessyo, Daisuke
Shoai-ryo, 376, Tsutsui-cho
Yamatokoriyama-shi Nara-ken(JP)


(74) Representative: Eisenführ & Speiser
Martinistrasse 24
D-2800 Bremen 1(DE)

EP 0 289 013 A2

(54) A power supply for a magnetron.

(57) A power supply for a magnetron provided with an inverter circuit, a high-tension transformer, a magnetron. In order to shorten the time required from the feeding of the power to the cathode of the magnetron to the arrival at the rated output through the start of the oscillation, a mechanism for detecting the oscillation start time point of the magnetron is provided so that the controlling operation is adapted to be effected to be rated output immediately after the oscillation. Winding for output voltage detecting use is provided on the high-tension transformer to detect the oscillation of the magnetron.

Fig. 1

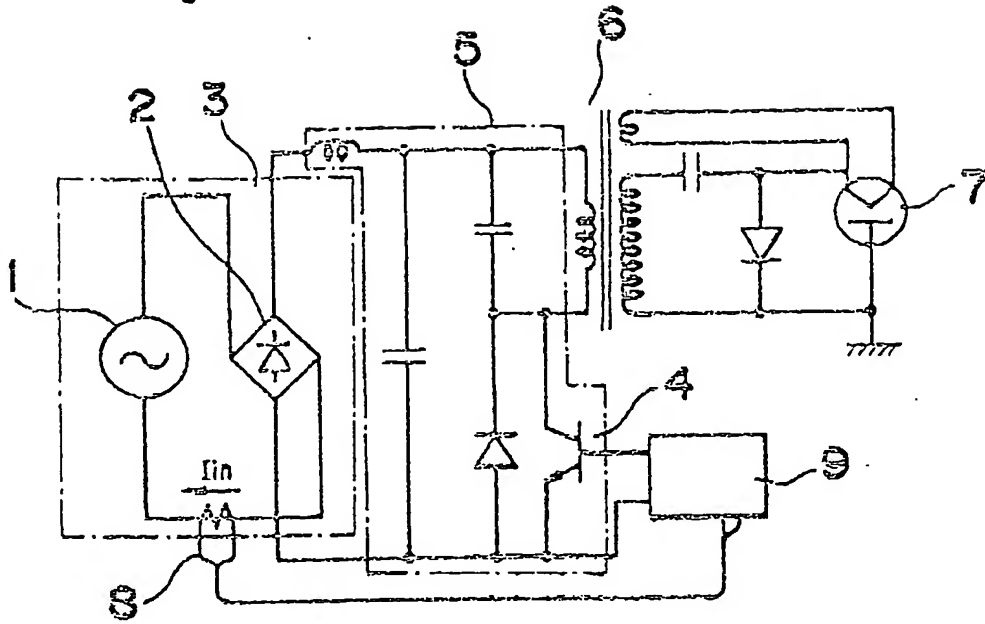

BACKGROUND OF THE INVENTION

The present invention generally relates to a power supply for a magnetron, wherein high-tension power-supply to be applied upon a magnetron is adapted to be provided by an inverter circuit.

Generally, various types of magnetron power supplies, each using an inverter circuit, are used. The description will be given by way of a power supply for a magnetron for use in a high-frequency heating apparatus.

There is a circuit diagram of a magnetron power supply for a conventional high-frequency heating apparatus in Fig. 1. A commercial power-supply 1 is rectified by a diode bridge 2 to provide a unilateral power supply 3. The unilateral power supply 3 is converted into high frequencies by an inverter circuit 5 including a switching element 4, is boosted and rectified by a high-tension transformer 6, thereafter is applied upon a magnetron 7. A power controlling system of this high-frequency heating apparatus uses an input current controlling system for controlling so that the input current I_{in} from the commercial power supply 1 may become a given value. Namely, an inverter controlling circuit 9 receives a signal of an input current detecting portion 8 to adjust the input current I_{in} to a given value. (The construction time ratio of the switching element 4 is adjusted.)

The current flows only to the heater portion, but does not flow between the anode and the cathode before the magnetron 7 starts its oscillation with its cathode temperature sufficiently rises to a desired temperature. When the input current I_{in} is controlled to the oscillating operation of the magnetron, excessive voltage is caused between the anode and the cathode to deteriorate the withstand voltage. Also, an inconvenience that the service life of the magnetron 7 becomes short may be caused through the excessive current flowing into the heater. Accordingly, at first the input current adapted to be controlled to a value smaller than a given value. A control portion 9 has a time controlling mechanism for switching the input current to a steady-state value after the time lapse sufficient enough to start the oscillation so as to settle the problem.

Time necessary to start the oscillation is 4 seconds when the magnetron is kept cold, 2 seconds when it is kept warm. In a case like this, in the input current controlling system by the time control mechanism, time for limiting the input current to a small value is required to be set at approximately 5 seconds such as time longer than the maximum time (4 seconds) necessary to start the oscillation.

When it is set like this, time is required to control the input current to a small value without fail for 5 seconds even when the magnetron is kept warm. Accordingly, in the conventional high-frequency heating apparatus using such a control system as described hereinabove, this time difference (5-2=3 seconds) requires the period for controlling to the smaller input current although the controlling operation may be effected to the given input current, thus resulting in the wasteful time to the high-speed cooking apparatus.

Fig. 2 shows a timing chart of input current I_{in} before the oscillation start of the magnetron, magnetron output P_o , and voltage V_{AK} between the anode and the cathode. In the periods a and b, the value is restricted to a small one in input current I_{in} , with the given output P_o from the magnetron being not caused, and in the period c, the output of the magnetron becomes the given value. The time necessary for the magnetron to start its oscillation is only the period of the a. The period of the a may be almost zero, even in the period of the b, the current is limited, with this period being wasted.

In order to shorten the wasteful time, there is a method of feeding heating power by a heater transformer which is separate from the high-tension transformer 6 to pre-heat the cathode of the magnetron 7 in advance. However, the apparatus becomes larger in size and higher in cost.

Accordingly, it is extremely difficult to shorten the rising time of the cathode temperature when the cathode of the magnetron is cold, with restriction being caused in the reduction of the wasteful time in the conventional construction.

During the period b of the wasteful time, the input current is so restricted that the power is not fed sufficiently to the heater of the magnetron. Thus, the magnetron is oscillating with the cathode temperature being lower than the desired temperature. The emission of the cathode is likely to be short, so that the oscillation becomes unstable enough to cause so-called emission modulating.

Accordingly, the disadvantage is so serious that the life service of the magnetron may be shortened.

SUMMARY OF THE INVENTION

Accordingly, an essential object of the present invention is to provide power supply for a magnetron, which is capable of removing wasteful time at the starting operation through the detection of the oscillation start of the magnetron.

Another important object of the present invention is to provide a power supply for a magnetron, which is capable of preventing the magnetron from being deteriorated through the modulating.

In accomplishing these and other objects, according to one preferred embodiment of the present invention, there is a power supply for a magnetron which includes a unilateral power supply, at least one switching element which converts the output of the unilateral power supply into high-frequencies and an inverter circuit having the driving circuit, a magnetron which high frequencies to heat food, fluids and so on, a transformer which boosts the output of the inverter circuit to feed the power to the magnetron, and which is characterized in that the transformer is composed of primary winding connected with the inverter circuit, secondary winding for feeding the high-tension high-frequency power to the magnetron, tertiary winding for feeding the low-tension high-frequency power to the cathode heater of the magnetron, fourth winding for giving voltage signals to the driving circuit, the coupling coefficient K₂₄ between the fourth winding and the secondary winding is larger than the coupling coefficient K₁₄ between the fourth winding and the primary winding. In this construction, in a period before the magnetron starts its oscillation, the high voltage is caused in the secondary winding. However, the coupling between the fourth winding and the secondary winding is adapted to be higher than the coupling between the fourth winding and the primary winding, so that the detection voltage signal is caused which is stronger in correlation to the higher voltage to be caused in the primary winding, and thus is proportional to the higher voltage of the secondary winding. As the oscillation start time of the magnetron is detected by the output signal of the fourth winding, the driving circuit may be constructed so that the inverter circuit may be switched in operation before the oscillation start of the magnetron and after the oscillation. Namely, at the starting operation, the operative frequency of the inverter is controlled so that the output voltage of the secondary winding may not be excessive as compared with the given value. The operative frequency is controlled so that the given electromagnetic waves may be outputted after the oscillation of the magnetron. Accordingly, a controlling operation may be effected so that the electromagnetic wave output of the magnetron in the shortest time of the respective conditions may reach the given value regardless of the cathode temperature, high or low, of the magnetron at the starting time. Namely, when the cathode temperature reaches the desired temperature in spite of the initial temperature of the cathode of the magnetron, the electromagnetic wave output becomes a rated value, so that the wasteful time in the conventional system may be prevented from being caused. Also, as the excessive voltage of the magnetron, the application of the excessive current during this period may be completely prevented. Therefore, the shorter service life may be prevented, and high reliability may be realized.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of the present invention will become clear from the following description taken in conjunction with the preferred embodiments thereof with reference to the accompanying drawings, in which:

Fig. 1 is a circuit diagram of a power supply for a magnetron in the conventional embodiment;

Fig. 2 is a timing chart at the magnetron oscillation start in the conventional embodiment;

Fig. 3 is a power-supply circuit diagram of a magnetron power supply in accordance with the present invention;

Fig. 4 is a secondary winding voltage waveform chart of a transformer of a magnetron power supply;

Fig. 5 is a characteristic chart of input current in the oscillation, non-oscillation of the magnetron of the magnetron power supply, the voltage between the anode, cathode;

Fig. 6 is a timing chart at the magnetron oscillation start of the power supply;

Fig. 7 is a perspective view in one embodiment of the transformer of the power supply;

Fig. 8 is a cross-sectional view of the transformer;

Fig. 9 is a power-supply circuit diagram of the magnetron power supply in the other embodiment;

Fig. 10 is a power-supply circuit diagram of the magnetron power supply in the embodiment of the present invention, using half-wave voltage doubler in the high voltage;

Fig. 11 is a voltage waveform chart between the anode and the cathode of the magnetron in the circuit of Fig. 10; and

Fig. 12 is a circuit diagram of the magnetron power supply in the embodiment of the present invention for effecting the secondary current feedback control.

5

DETAILED DESCRIPTION OF THE INVENTION

Before the description of the present invention proceeds, it is to be noted that like parts are designated by like reference numerals throughout the accompanying drawings.

Referring now to the drawings, there is shown in Fig. 3, a circuit block diagram of a high-tension power supply generating portion for a high-frequency heating apparatus according to one preferred embodiment of the present invention. Referring to Fig. 3, the power of the commercial power supply 10 is rectified by a diode bridge 11, with a unilateral power supply 12 being formed. An inductor 13, a capacitor 14 serve as filters with respect to the high-frequency switching operation of an inverter circuit 15.

The inverter circuit 15 is composed of a resonance capacitor 16, a power transistor 17 for switching use, a diode 18 and a driving circuit 19. A power transistor 17 is switched through a given period and a duty (namely, on/off time ratio) by base current to be fed from the driving circuit 19. The high-frequency power thus caused is fed to the primary winding 21 of the transformer 20 so as to be expressed as high-frequency high-tension output to the secondary winding 22, so that it is fed between the cathode 23a of the magnetron 23 and the anode 23b. The low-tension high-frequency power is caused in the tertiary winding 24 of the transformer 20 to heat the cathode 23a of the magnetron 23 to operate the magnetron 23.

The input current detector 25 detects an input current I_{in} from a commercial supply 10. The difference between a current reference signal 27 and a signal obtained by rectification of the output through the input current rectifying circuit 26 is amplified by a current error amplifying circuit 28, so that it is inputted into a comparator 29. A comparator 29 forms the on/off pulse of the power transistor 17 as an output signal 31 by the input signal and the saw-tooth wave from the saw-tooth wave generating circuit 30. The input current controlling portion 32 is composed of the input current detector 25 through the comparator 29. The output of the current error amplification circuit 28 is increased as the input current I_{in} is decreased, with the on time of the output signal 31 of the comparator 29 being longer so that the operation is effected in such a direction as to increase the input current I_{in} . Inversely, when the input current I_{in} increases, an operation is effected to reduce the input current. In this manner, the input current controlling portion 32 controls so that the input current I_{in} may become a given value.

Also, as the fourth winding 33 provided on the transformer 20 has the connection with the secondary winding 22 raised, the high-tension voltage V_{AK} is detected. The signal provided through rectification of the output by the output voltage signal rectification 34 is compared with a voltage reference signal 35 by a comparator 36. The output logic is inputted into a current reference signal switching circuit portion 37 to switch the current reference signal 27 in accordance with the high-tension voltage V_{AK} . Namely, as the high-tension voltage V_{AK} becomes higher with little input current I_{in} before the magnetron 23 starts its oscillation, the current reference signal 27 is controlled low so as to set the voltage reference signal 35 to switch the current reference signal 27 by a transistor 38 so that the input current I_{in} may increase when the high-tension voltage V_{AK} has been lowered because of the oscillation start of the magnetron 23. In other words, the oscillation start of the magnetron 23 is detected by the output voltage drop of the fourth winding 33 so as to match the input current I_{in} to rating. Fuse 39 is provided to be protected from smoking when the fourth winding 33 has been short-circuited.

Fig. 4 shows the high-tension power supply V_{AK} voltage waveform when the magnetron 23 has been oscillated and the magnetron has not oscillated, with difference therebetween being apparent. The voltage in this minus direction is one in the sequential direction of oscillating the magnetron 23. Such an operation principle diagram as shown in Fig. 5 shows the relationship with respect to the input current I_{in} with the voltage being defined as V_{AK} .

Referring to Fig. 5, reference character V1 is a permissible applied voltage of the magnetron 23. reference character I1 is an input current I_{in} from the commercial power-supply 10 when the high-tension voltage V_{AK} is equal to the V1 with the magnetron not being oscillated. Reference character V2 is a high-tension voltage V_{AK} at the rated output of the magnetron 23 and an input current I_{in} at this time. The input current I1, when the magnetron 23 is not oscillated, is less than I2, while the output voltage V2, when it is oscillated, is smaller than the V1.

Accordingly, in Fig. 3, an input current detector 25 detects the input current I_{in} to set the rectifying

direction of the output voltage signal rectifying circuit 34 so that a voltage signal equivalent to the high-tension voltage V_{AK} may be detected by the fourth winding 33. the I1 may be set at the on of the transformer 38 of a current reference signal switching circuit portion 37, the I2 may be set at the off thereof. When a voltage reference signal 35 is set so as to be corresponded to between the V1 and the V2, the input current is controlled to the I1 before the magnetron 32 starts its oscillation, to the I2 when the oscillation is started.

As the voltage reference signal 35 is set to be switched at a place where the signal becomes smaller than the V1, larger than the V2 to effect such a controlling operation as described hereinabove, it is indispensable to establish $V1 > V2$. Furthermore, it is possible to detect the oscillation of the magnetron 23 more easily if the $V1:V2$ is larger. The voltage signal to be expressed in the secondary winding 22 is not completely similar to each other, but it is possible to retain the relationship of the $V1 > V2$ if the coupling coefficient K24 of the secondary winding 22 and the fourth winding 33 is made larger, the coupling coefficient K14 of the primary winding 21 and the fourth winding 33 is made smaller. Table 1 shows the value of the $V1:V2$ when the K24 and K14 have been changed.

Table 1

K24	K14	V1/V2
0.704	0.494	1.75
0.531	0.412	1.08
0.451	0.384	1.01
0.372	0.386	0.55
0.524	0.532	0.34

Fig. 6 is a starting characteristic graph showing the variation in the value of the V_{AK} and I_{in} from the operation start of the circuit of Fig. 3. When the magnetron starts its oscillation, the V_{AK} is lowered. The controlling operation is effected so that the setting value of the I_{in} may be switched from the I1 to the I2.

In Fig. 3, the transformer is caused for the detection of the input current. A method of detecting the current by the voltage drop through the insertion of the resistor into the system may be varied. Also, the input current controlling portion 32 may not be limited to the circuit construction shown.

Also, even when the voltage doubler rectifying circuit have been provided between the high-tension transformer 20 and the magnetron 2,3, the similar method may be adapted.

In the above-described construction, the input current I_{in} is changed so that the rated output may be automatically obtained when the magnetron starts its oscillation whether the magnetron is kept cold or warm, so that the wasteful time as in the conventional example is not caused at all, and furthermore the application of the excessive voltage upon the magnetron may be prevented. Accordingly, a magnetron power supply for the high-frequency heating apparatus which is higher in reliability may be realized.

Fig. 7 is a perspective diagram of a magnetron power supply of the present invention. Fig. 8 is a cross-sectional view in one embodiment of Fig. 7 taken along a line A-A'. In Fig. 7 and Fig. 8, the same reference characters are given to the components which are the same as those in Fig. 3. The VR type of cores 40, 41 of the transformer are composed of a material which is ferrite in property and less in high-frequency loss, with gap spacers 42, 43 being grasped between the cores to constitute a magnetic path. The cores 40, 41 are secured with a fixture 44, and a stand 45. The respective windings 21, 22, 24, 33 are wound around a primary bobbin 46 and a secondary bobbin 47 integral with a gap spacer 43 made of resin material, with sufficient space t1 being provided between the primary winding 21 and the secondary winding 22. In the general high-frequency heating apparatus, the anode of the magnetron and the casing are at the same potential. When the primary winding and the secondary winding have been short-circuited, it is extremely dangerous to have high voltage caused in the casing. In order to prevent this danger, the space t1 between the primary winding 21 and the secondary winding 22 is sufficiently made larger than the space t2 between the secondary winding 22 and the tertiary winding 24. For the similar reason, the space t3 between the tertiary winding 24 and the fourth winding 33 is sufficiently made larger. As described hereinabove, the

relationship between the coupling coefficient K_{14} of the primary winding 21, the fourth winding 33 and the coupling coefficient K_{24} between the primary winding 22 and the fourth winding 33 is $K_{14} < K_{24}$, the windings are positioned so that the tertiary winding 24, the secondary winding 22, the primary winding 21 are arranged in order from near the fourth winding 33 as shown in Fig. 8. As the coupling coefficient
 5 becomes generally higher if the space between the winding becomes near, $K_{14} < K_{24}$ is naturally established in the above-described arrangement, because the secondary winding 22 is closer to the fourth winding 33 than the primary winding 21 is. As the position of the gap spacer 43 is located between the primary winding 21 and the secondary winding 22, a gap which functions to leak the magnetic path to make the coupling coefficient smaller exists between fourth winding 33 and the primary winding 21, but no
 10 between the fourth winding 33 and the secondary winding 22, with the relationship of $K_{14} < K_{24}$ becoming obvious.

The primary winding 21 becomes substantially smaller in the conductor sectional-area and is increased in loss because of skin effect through the high frequency. In order to prevent the loss, so-called litz wires, which are composed of stranded fine wires each being insulated, are used. The primary winding lead is
 15 provided with protective tube to maintain the insulation. The secondary winding 22 is wound in four split so that the withstand voltage of the secondary winding 22, reactive current is controlled to reduce the heating. The low-pressure side lead 22a of the secondary winding 22 is connected with the transformer stand 45 and the cores 40, 41 for the same potential, with the potential of the cores being stabilized, thus resulting in high reliability.

As the tertiary winding 24, the fourth winding 33 are both reduced in the number of the windings, the covered wires are used to protect, insulate the outgoing lead wires, with high-tension silicone covered wires, vinyl chloride covered wires being used.

Fig. 9 shows the other embodiment, wherein the fourth winding 33 is constructed with an intermediate terminal 48 being provided on the secondary winding 22. The same reference numerals are given to the
 25 same components as those of Fig. 3.

In Fig. 9, as the fourth winding 33 provided on the transformer 20 is constructed with the intermediate terminal 48 being provided on the secondary winding, the value is proportional to the secondary winding voltage V_{AK} . Namely, the voltage variation of the V_{AK} appears as a voltage signal divided across both the ends of the fourth winding 33. The voltage reference signal 35 which is provided by the rectification of the
 30 voltage signal through the output voltage signal rectification circuit 34 is compared with the voltage reference signal 35 by a comparator 36. The output logic is inputted into a photo-coupler 49 of the current reference signal switching circuit portion 37 to switch the current reference signal. As the primary side of the transformer 20 is different in potential from the secondary side, it is required to give and take the signal by the photo-coupler 49. The oscillation start of the magnetron 23 is detected in this manner to perform the
 35 current controlling operation to remove the wasteful time. When the fourth winding 33 has been constructed with top in the secondary winding 22, the connection K_{24} between the secondary winding 22 and the fourth winding 33 becomes larger. Also, as the fourth winding is brought to the potential of the secondary winding, the insulation therebetween is unnecessary, so that the construction of the winding becomes easier to make.

Fig. 10 is an embodiment of the circuit construction with a voltage double rectification circuit 50 being
 40 provided under the high voltage. The same reference characters are given to the same components as those of Fig. 3.

In the circuit of Fig. 10, the voltage between the cathode 23a of the magnetron 23 and the anode 23b thereof becomes wave-shaped as shown in Fig. 11. When the magnetron 23 is not oscillated as in a case
 45 where the voltage doubler rectification circuit shown in Fig. 4 is not used, the voltage becomes lower than when it is oscillated, so that the oscillating condition of the magnetron may be detected. When a half-wave rectification circuit is provided as shown in the output voltage signal rectification circuit 34 in the case of the circuit of Fig. 10, the connection is performed in the consideration of the polarity of the fourth winding so that the diode 51 for half-wave rectification use of the output voltage signal rectification circuit 34 may be
 50 conducted when the voltage of the V_{AK} has been caused. When both-wave rectification circuit has been used for the output voltage signal rectification circuit 34, the same effect may be provided without any consideration of the polarity. In this circuit construction where the secondary winding output of the transformer 20 is applied upon the magnetron 23 through the voltage doubler rectification, the wasteful time at the oscillation start of the magnetron is removed, and further the boosting ratio at the transformer, i.e., the
 55 primary, secondary ratio may be approximately one half in order to boost twice as many as the voltage on the secondary side of the transformer by the voltage doubler rectification circuit 50. In other words, there is an effect that the winding of the second winding 21 may be half-waved.

Fig. 12 shows an embodiment of the present invention using a circuit which feedbacks the current of

the secondary side of the transformer to control it so as to stabilize the output of the apparatus. The same reference is given to the components which are same as those in Fig. 3.

In the circuit of Fig. 12, the input current I_{in} and the anode current I_A are interrelated to each other and are approximately proportional. Also, the anode current I_A and the secondary current I_s of the transformer are approximately proportional. Accordingly, the equal input, output controls may be effected even if the secondary current I_s of the transformer, instead of the input current I_{in} , is detected. The secondary current detecting portion 52 rectifies the voltage to be caused across both ends of the resistor through the insulation transformer 54 by the secondary current signal rectification circuit 55 when the current has been flowed to the secondary current detection resistor 53 so as to compare it with the current reference signal 27 to control the on, off ratio of the transistor 17. The circuit of Fig. 12 is equivalent to the circuit construction of Fig. 3 with the exception that the power is controlled by the secondary current I_s which is approximately proportional to it, instead of the input current I_{in} . It is desired so that the magnetron power supply should be controlled so as to be stabilized in output more than in input. Accordingly, the controlling operation of the power by the secondary current I_s , instead of the power controlling by the input current I_{in} , has an effect that the stabler power control may be effected by a portion closer the output. It is needless to say that means for the controlling operation by the anode current I_A of the magnetron has the same effect.

Although the present invention has been fully described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications are apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims unless they depart therefrom.

Claims

1. A power supply for a magnetron comprising a unilateral power supply, at least one switching element for converting the output of the unilateral power supply into high frequency and an inverter circuit having its driving circuit, a magnetron for generating high-frequency to heat food, liquid and so on, a transformer which boosts the output of the inverter circuit to feed power to the magnetron, the transformer comprising a primary winding to be connected with the inverter circuit, a secondary winding for feeding the high-tension high-frequency power to the magnetron, a tertiary winding for feeding the low-tension high-frequency to the cathode heater of the magnetron, and a fourth winding for giving voltage signals to the driving circuit, the coupling coefficient between the fourth winding and the secondary winding being made larger than the coupling coefficient between the fourth winding and the primary winding.
2. A power supply for a magnetron described in claim 1, wherein secondary winding is provided between the fourth winding and the primary winding.
3. A power supply for a magnetron described in claim 1 or claim 2, wherein a film wire is used for the fourth winding.
4. A power supply for a magnetron described in claim 1, wherein means is provided which fuses if a current of a given value or more flows to the fourth winding.
5. A power supply for a magnetron described in claim 1, wherein an intermediate terminal is provided on the secondary winding of the transformer to construct a fourth winding.
6. A power supply for a magnetron described in claim 1, wherein each winding is arranged in the order of primary winding, secondary winding, tertiary winding, fourth winding.
7. A power supply for a magnetron described in claim 1, claim 6, wherein the space between the tertiary winding and the fourth winding is made larger than the space between the secondary winding and the tertiary winding.
8. A power supply for a magnetron described in claim 1, claims 6, wherein the core of the transformer is provided with a gap, which is provided near the primary winding.
9. A power supply for a magnetron described in claim 1, claim 6, wherein the space between the primary winding and the secondary winding is made larger than the space between the secondary winding and the tertiary winding.
10. A power supply for a magnetron described in claim 1, wherein one terminal of the secondary winding is the same in potential as the core of the transformer.
11. A power supply for a magnetron described in claim 1, wherein the output of the secondary winding is rectified in half the wave voltage doubler to apply it upon the magnetron.
12. A power supply for a magnetron described in claim 1, wherein the core of the transformer is provided with a gap, which is composed of a space integral with the bobbin of the primary winding.

13. A power supply for a magnetron described in claim 1, wherein the secondary winding is division-wound.

14. A power supply for a magnetron described in claim 1, wherein litz wire is used for the primary winding.

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

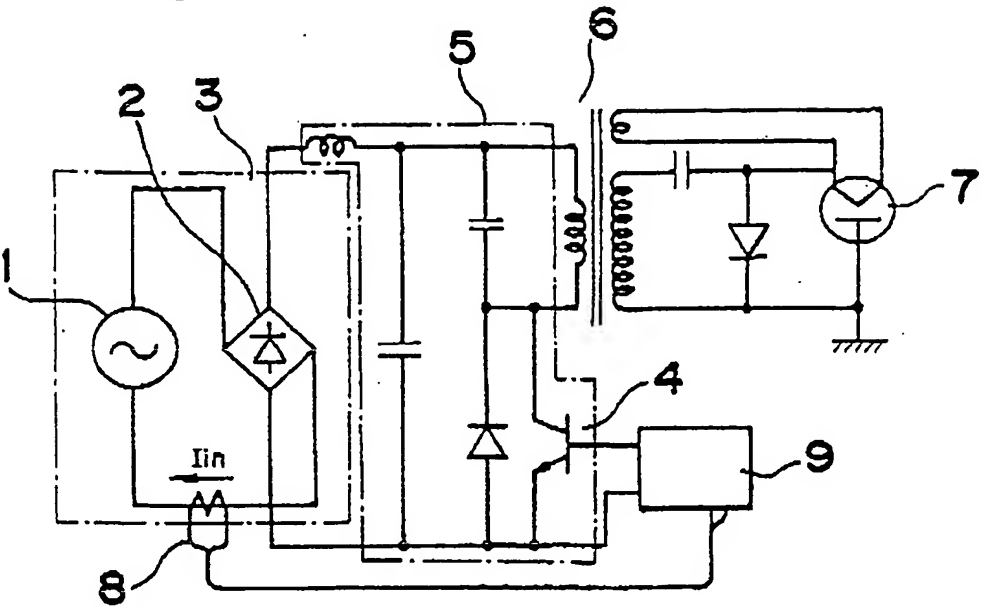


Fig. 2

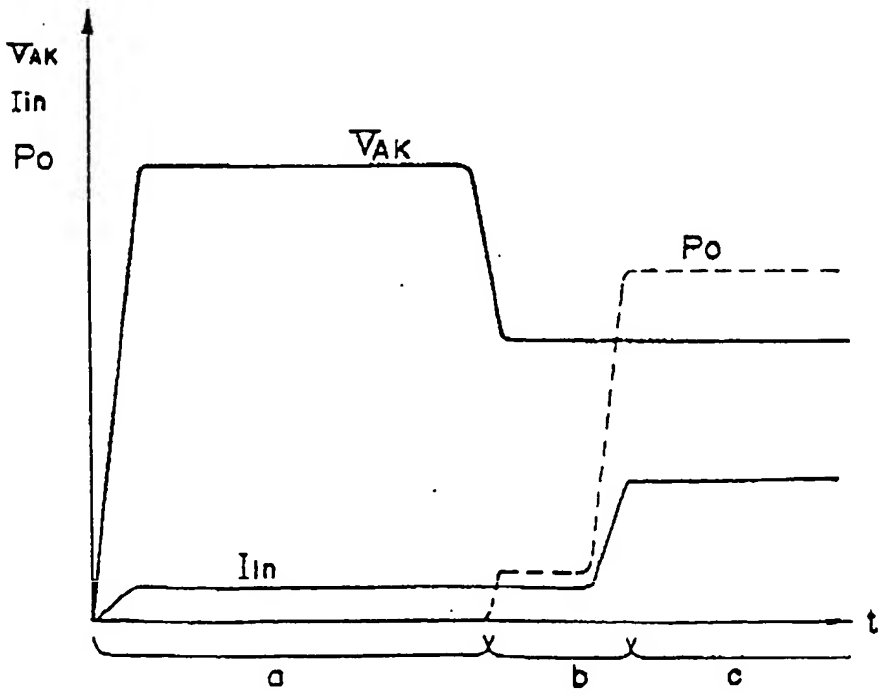


Fig. 3

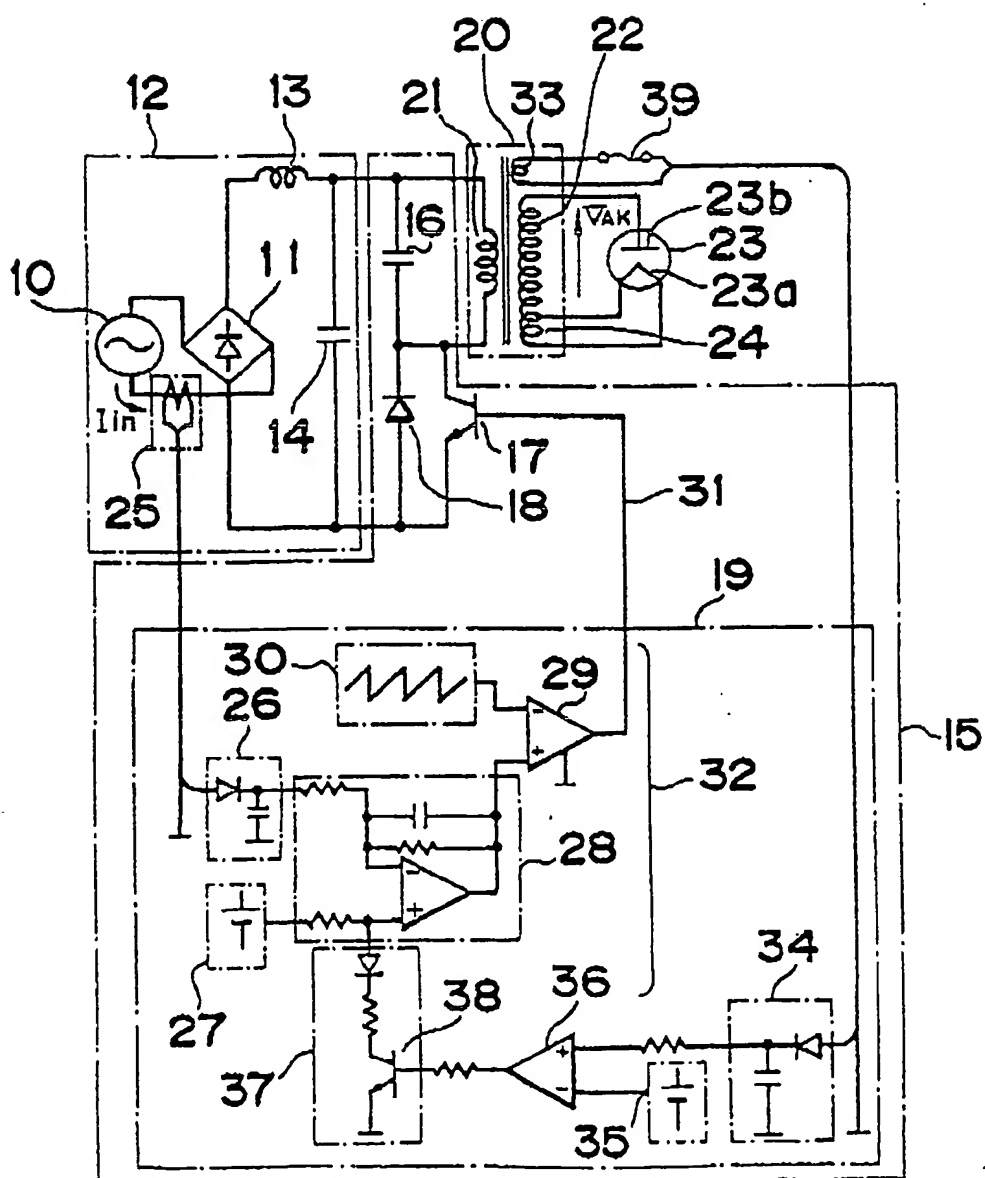


Fig. 4

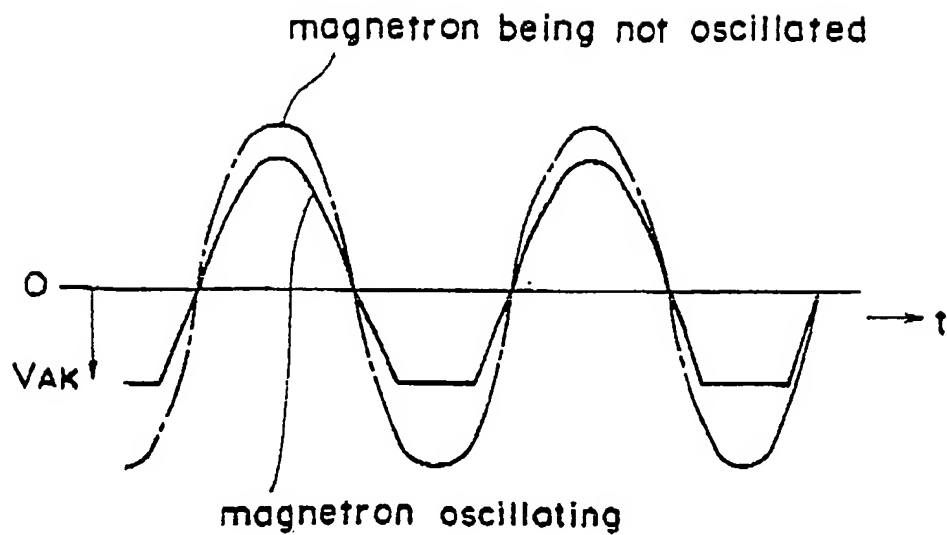


Fig. 5

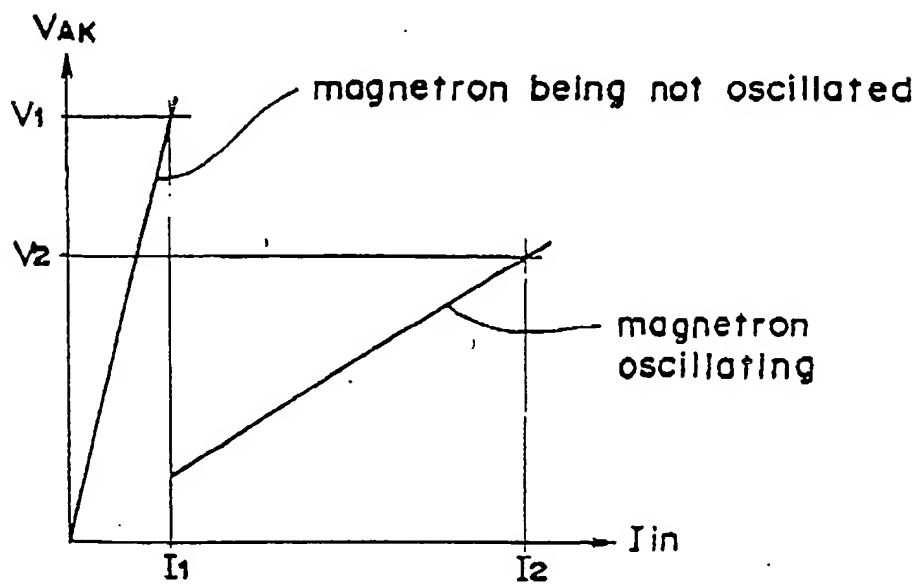


Fig. 6

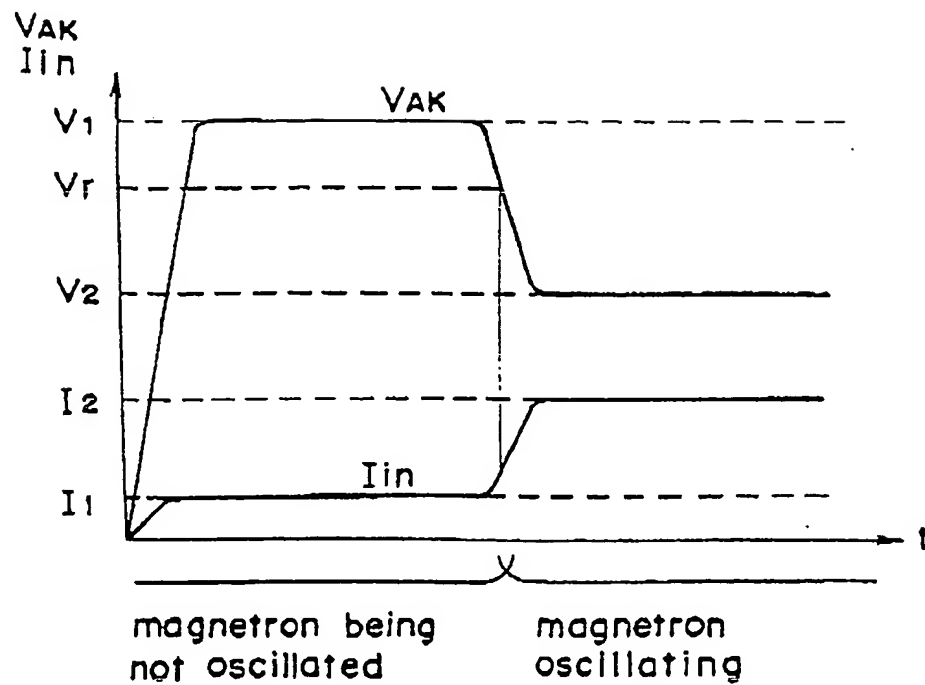


Fig. 7

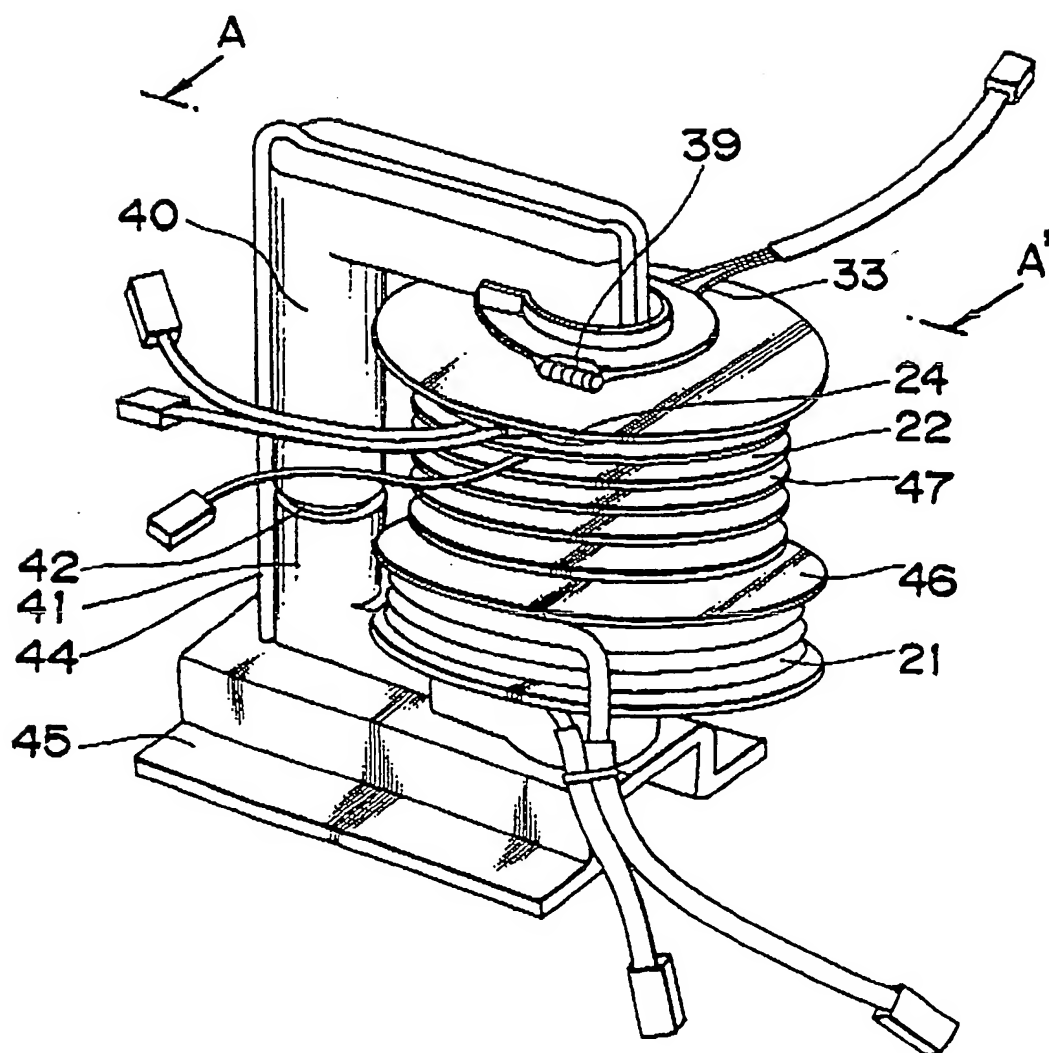


Fig. 8


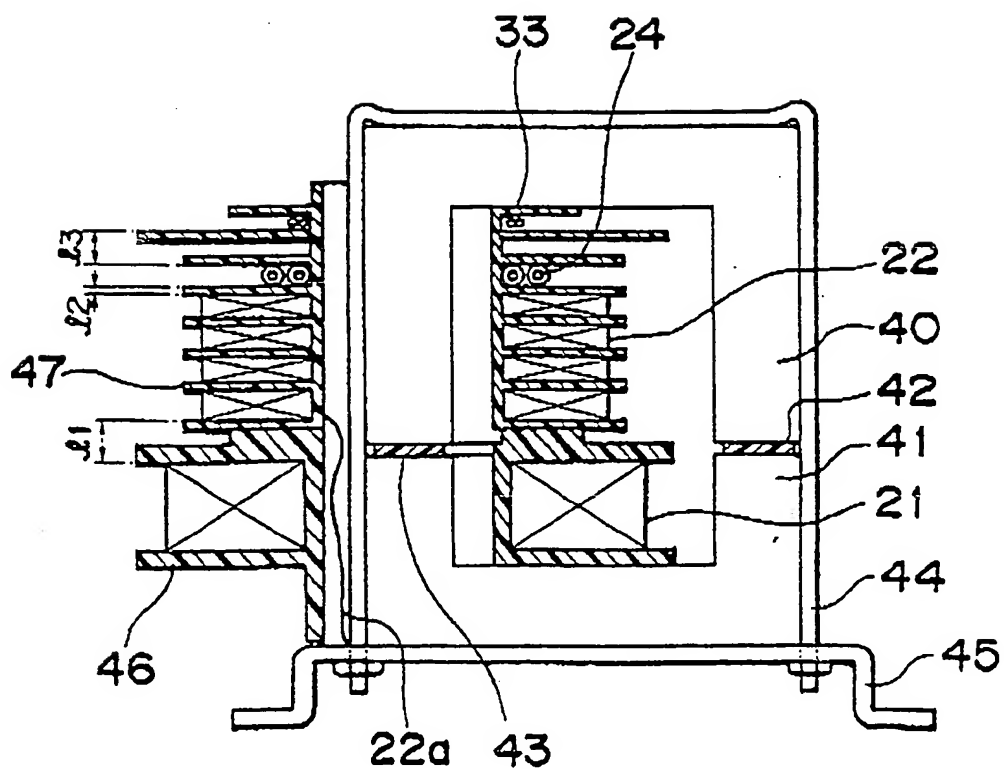


Fig. 9

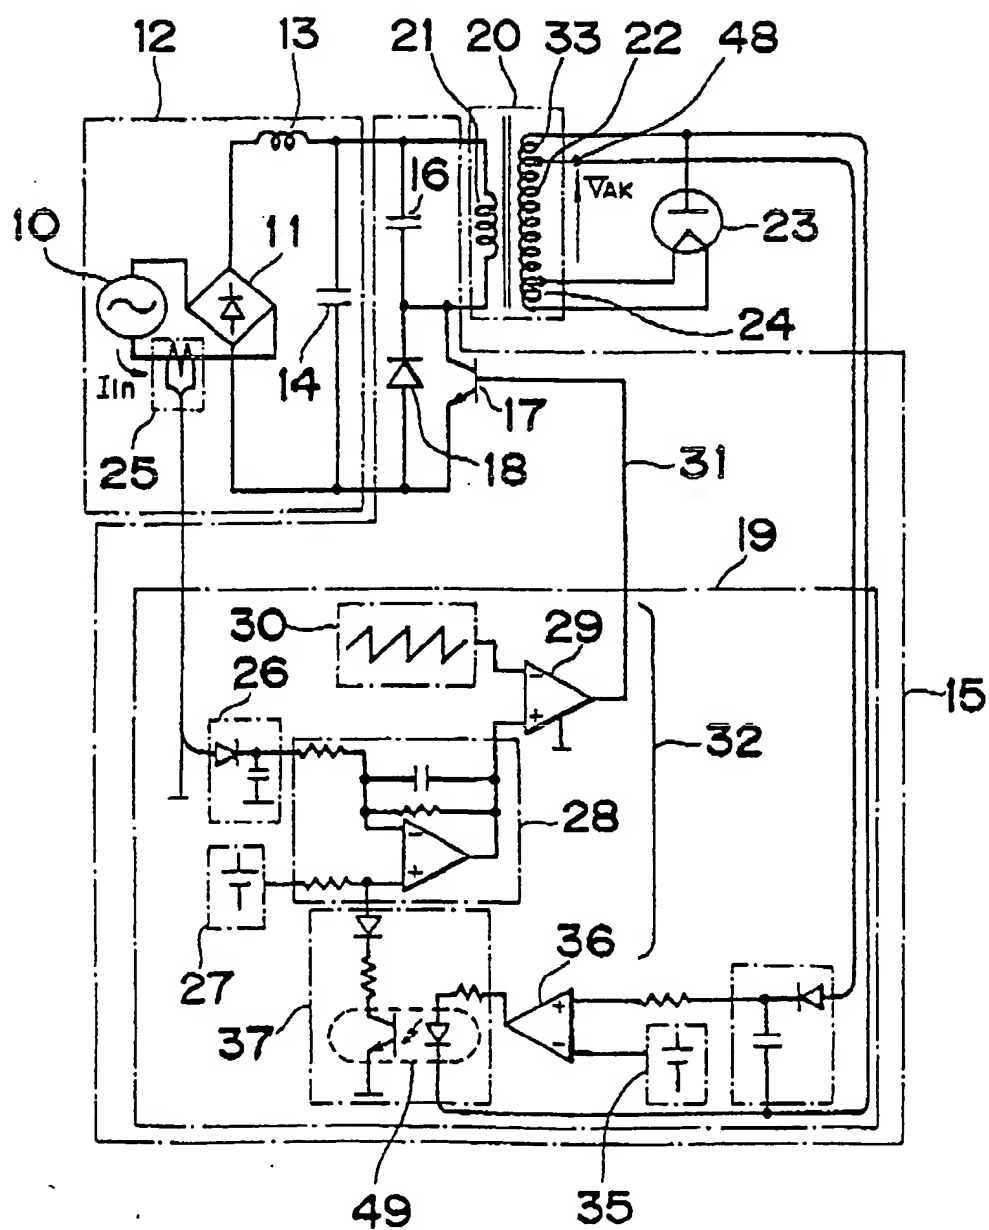

0 289 013

Fig. 10

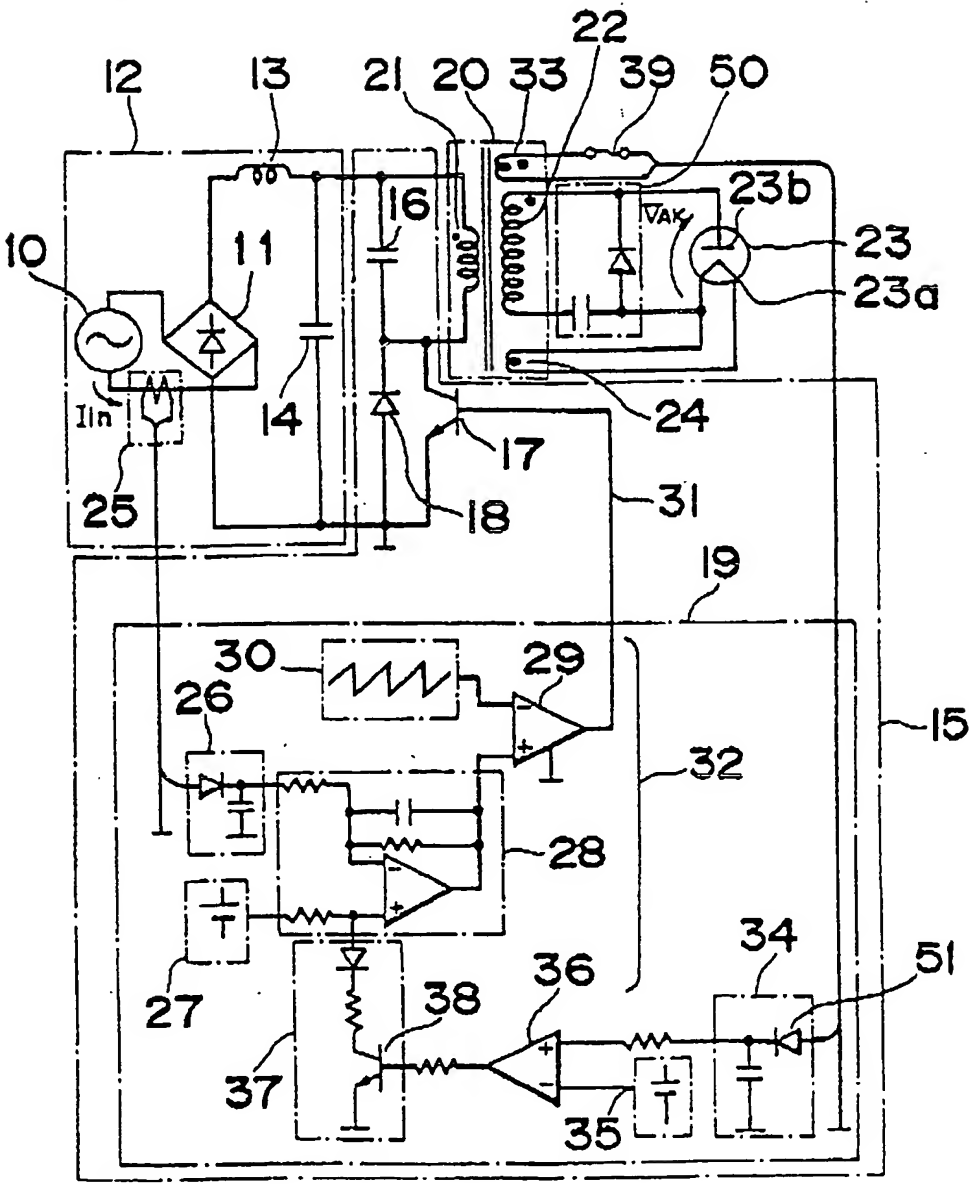


Fig. 11


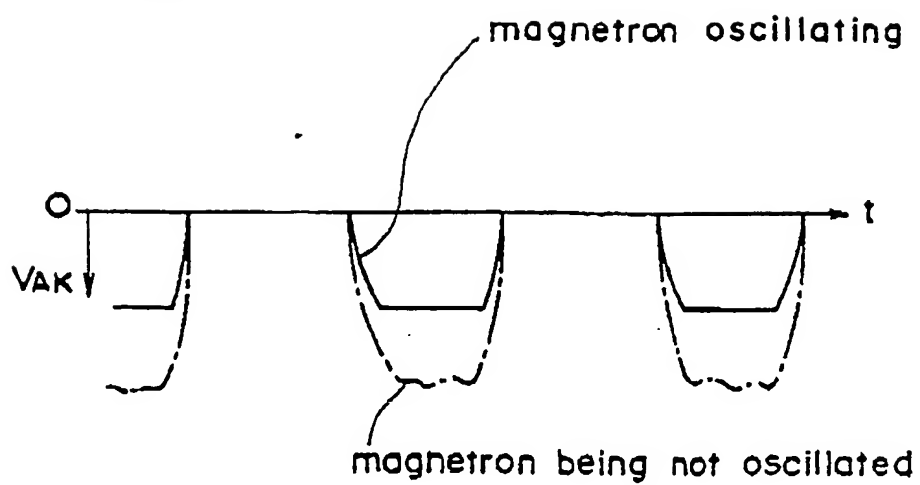


Fig. 12



(19)

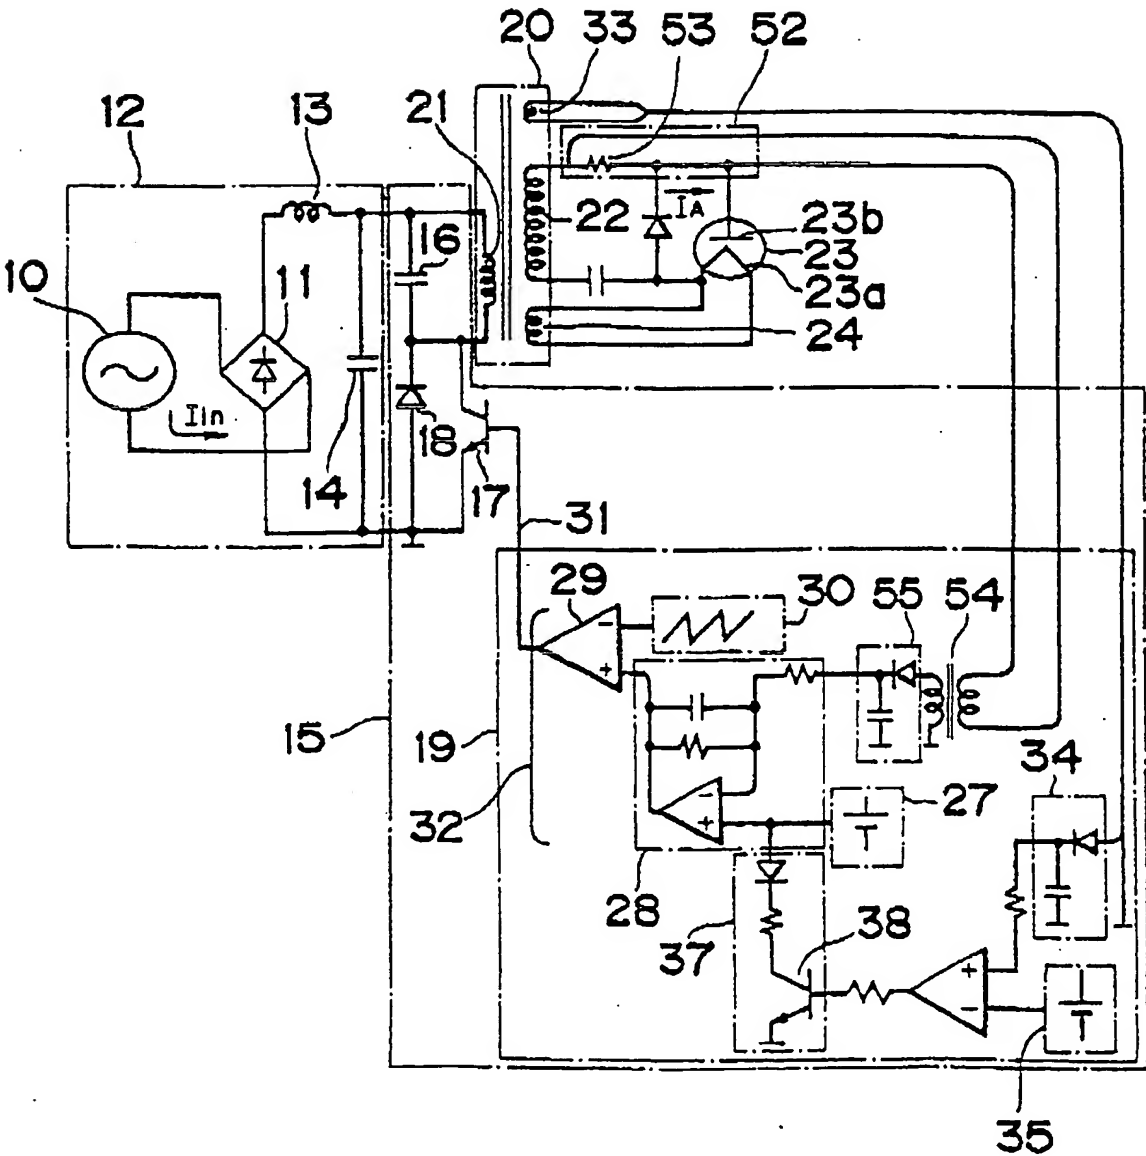

Europäisches Patentamt

European Patent Office

Office européen des brevets

(11) Publication number:

0 289 013**A3**

(12)


EUROPEAN PATENT APPLICATION(21) Application number: **88106792.0**(51) Int. Cl.4: **H05B 6/66 , H02M 3/335**(22) Date of filing: **28.04.88**(30) Priority: **30.04.87 JP 106636/87**
30.04.87 JP 106637/87(43) Date of publication of application:
02.11.88 Bulletin 88/44(64) Designated Contracting States:
DE FR GB IT NL SE(68) Date of deferred publication of the search report:
07.02.90 Bulletin 90/06(71) Applicant: **Matsushita Electric Industrial Co., Ltd.****1006, Oaza Kadoma****Kadoma-shi Osaka-fu, 571(JP)**(72) Inventor: **Matsumoto, Takahiro**
3-8-9, Awa, Ikagura-cho
Ikoma-gun Nara-ken(JP)Inventor: **Suenaga, Haruo**
12-14-3, Nagamodai Kamo-cho
Soraku-gun Kyoto-fu(JP)Inventor: **Maehara, Naoyoshi**
385-75, Yao Tawaramoto-cho
Shiki-gun Nara-ken(JP)Inventor: **Sakamoto, Kazuho**
24, Umetani kitatani Kizu-cho
Soraku-gun Kyoto-fu(JP)Inventor: **Niwa, Takashi**
5-31, Okidome, Ikaruga-cho
Ikoma-gun Nara-ken(JP)Inventor: **Kusunoki, Shigeru**
89-4, Yatayama-cho
Yamatokoriyama-shi Nara-ken(JP)Inventor: **Shitaya, Takao**
80-11, Yatayama-cho
Yamatokoriyama-shi Nara-ken(JP)Inventor: **Bessyo, Daisuke**
Shoal-ryo, 376, Tsutsui-cho
Yamatokoriyama-shi Nara-ken(JP)(74) Representative: **Eisenführ & Speiser**
Martinistrasse 24
D-2800 Bremen 1(DE)**EP 0 289 013 A3**

(54) A power supply for a magnetron.

(57) A power supply for a magnetron provided with an inverter circuit, a high-tension transformer, a magnetron. In order to shorten the time required from the feeding of the power to the cathode of the magnetron to the arrival at the rated output through the start of the oscillation, a mechanism for detecting the oscillation start time point of the magnetron is pro-

vided so that the controlling operation is adapted to be effected to be rated output immediately after the oscillation. Winding for output voltage detecting use is provided on the high-tension transformer to detect the oscillation of the magnetron.

Fig. 3

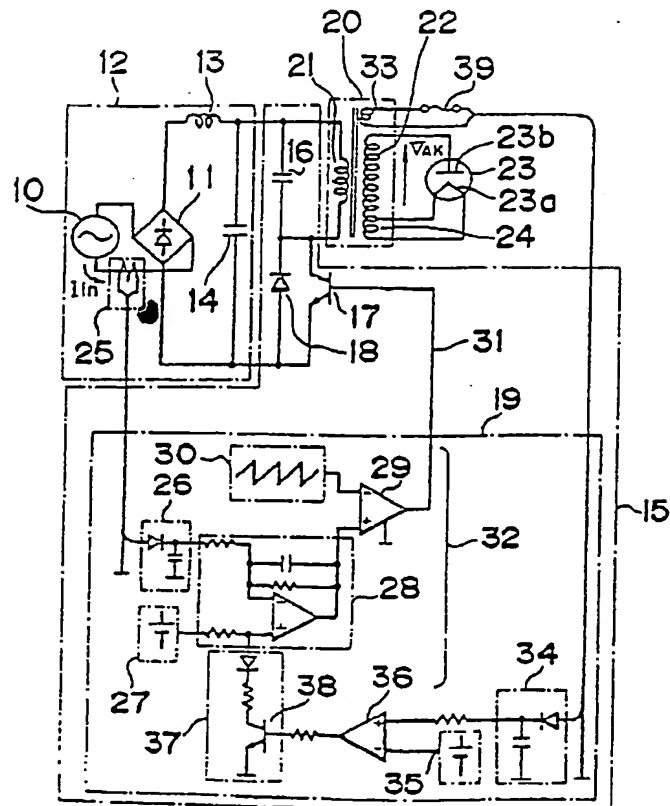



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 88 10 6792

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
A	US-A-4 318 165 (KORNRUMPF et al.) * Whole document * ---	1	H 05 B 6/66 H 02 M 3/335
A	FR-A-2 324 116 (MATSUSHITA ELECTRIC INDUSTRIAL CO.) * Page 15, lines 8-25; figure 9 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			H 02 M H 05 B H 03 B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 06-11-1989	Examiner GARDELLA S.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	